



ASTERISK
Connect

RECEPTIONIST PLUGIN

FOR

ASTERISK CONNECT FRAMEWORK

(Configuration Manual)


Europesip Communications SL
www.asteriskconnect.com




Receptionist Plugin (Orkestal) Settings

Setting the integrated SIP Phone


To configure the integrated SIP Phone we go to the configuration window of plugin via the context menu notification icon

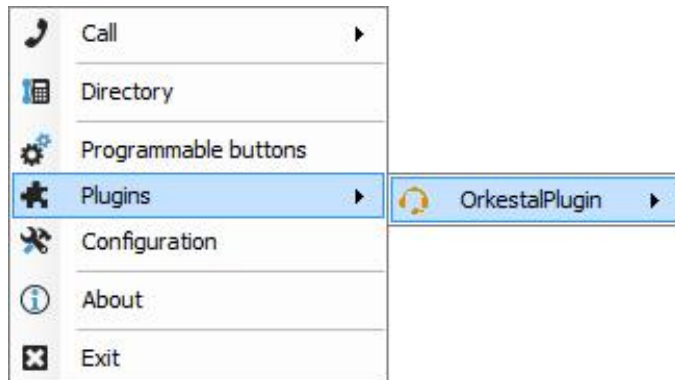


Also, we can configure this by clicking on the desired plugin and setup on the configuration of plugin interfaces.

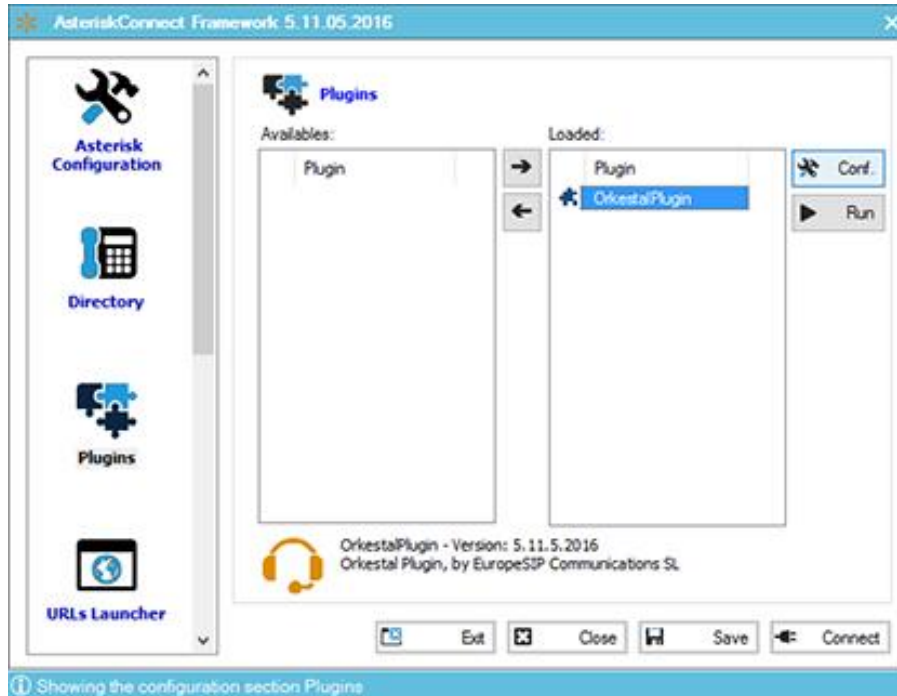

Once open the configuration Plugin, click on the button "Configure SIP accounts"

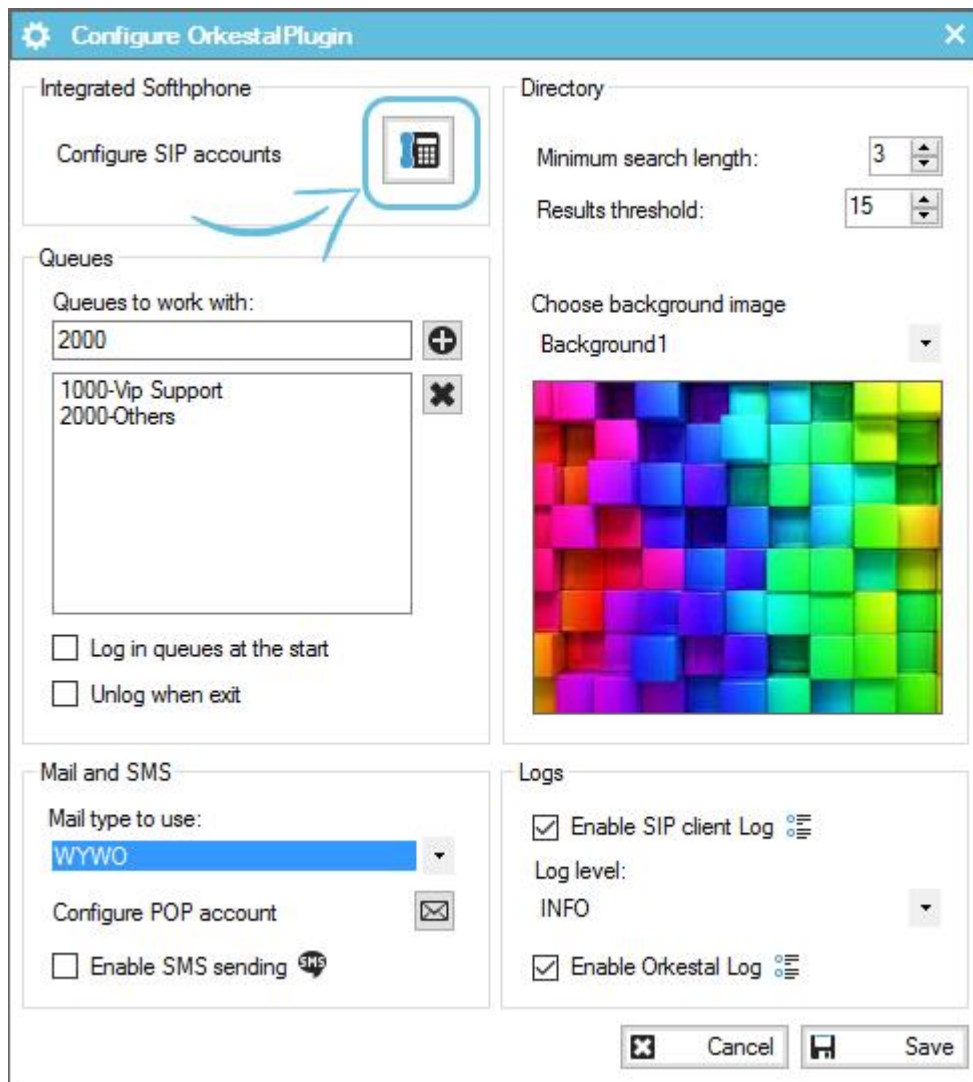


The integrated softphone configuration opens. Now we add a SIP account, using the "New Account" button. The editing window / addition of SIP accounts

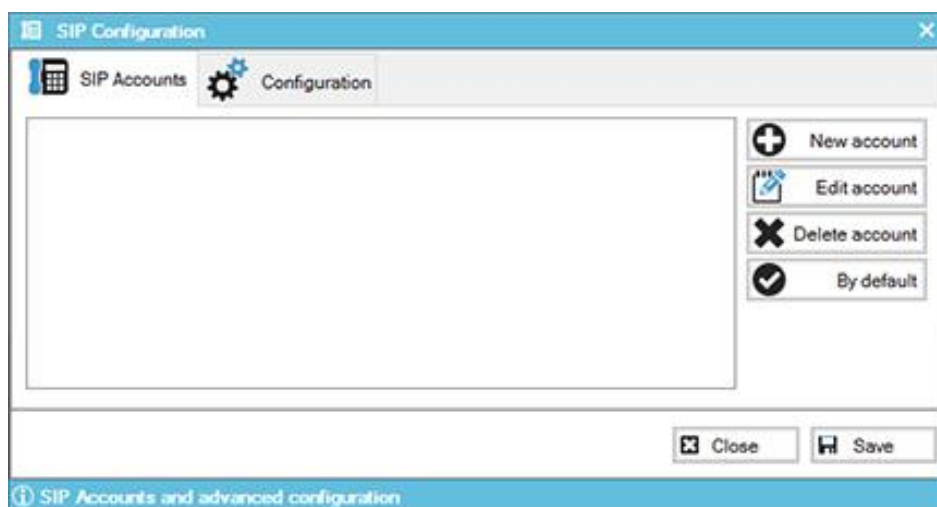


We enter the data how..:


Display Name	Descriptive name for the SIP account:
Extension	Extension number to register
Password	Extension Password
SIP Server	Name or IP of SIP server
SIP Serv. Port	Port to connect the extension (default 5060)
Local IP	IP from which you will register the extension (Auto = Any)

And click on "Save" and return to the window of account management and configuration:

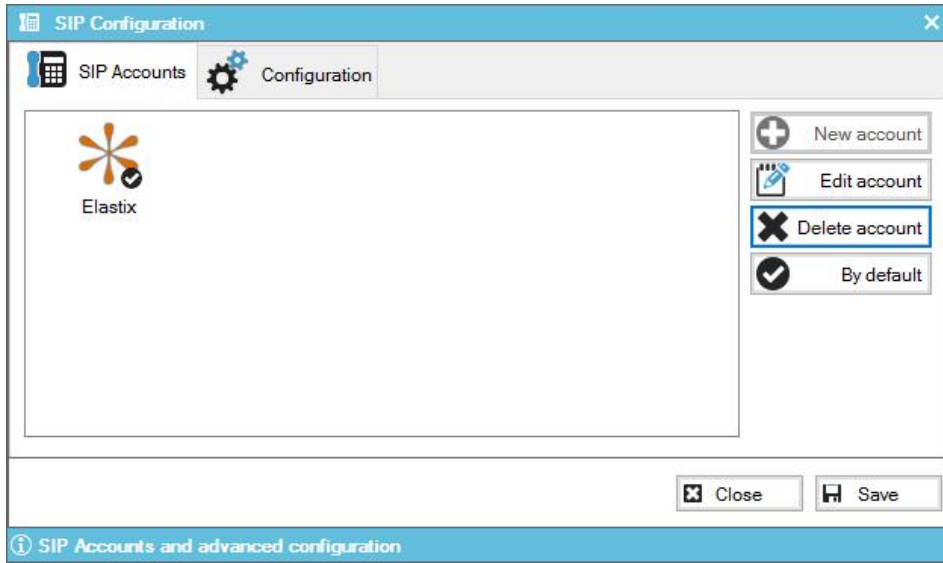


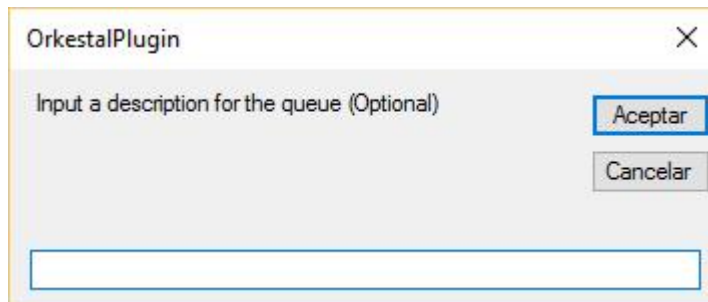
Configure Queues

To configure job queues of Orkestal, go to configuration window plugin same manner as in 1. Once in the configuration window, write in the text box code line we want and click on the button  group "Queues".

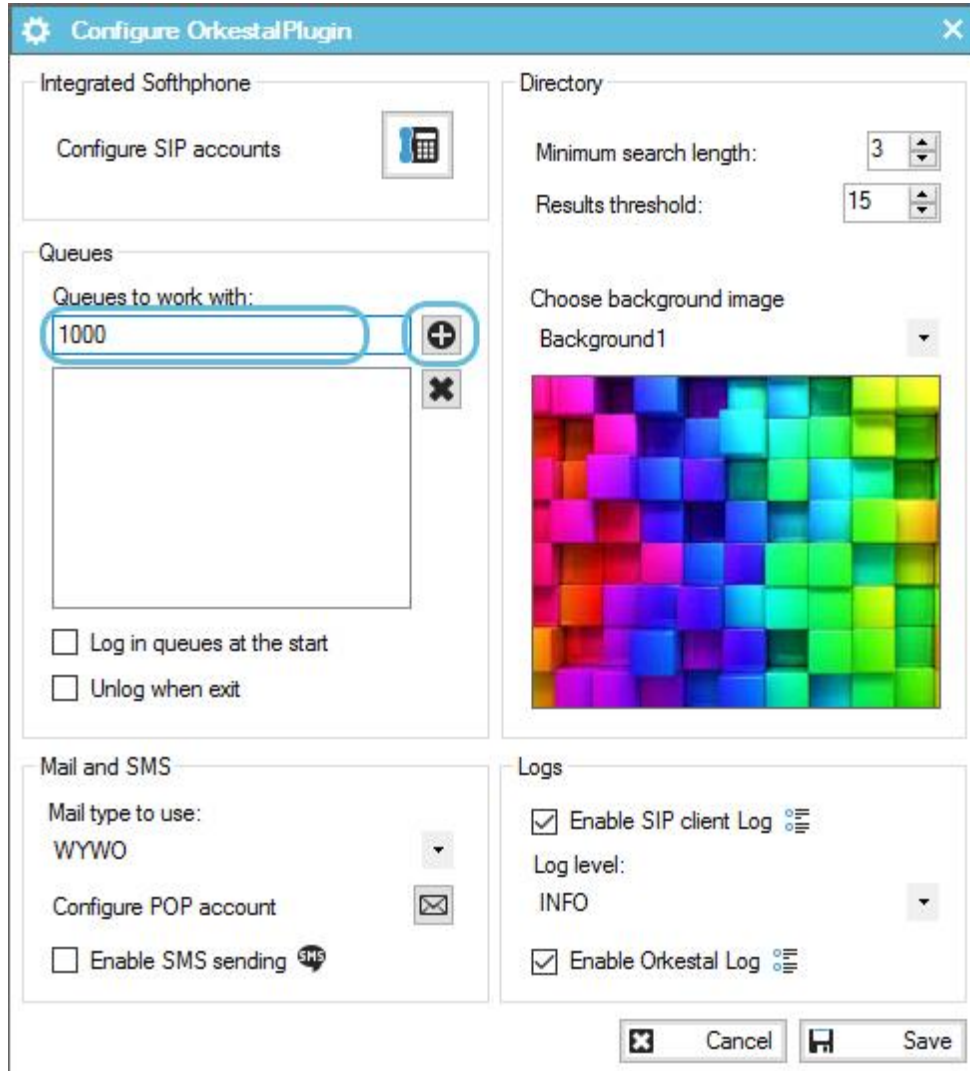


The screenshot shows the 'Configure OrkestalPlugin' window. The 'Queues' section is highlighted with a blue circle around the '1000' text box and the plus icon button. Other sections include 'Integrated Softphone', 'Directory', 'Mail and SMS', and 'Logs'.


Once pressed the button  the application form requires a descriptive name for the queue. This is optional.



The screenshot shows a small dialog box titled 'OrkestalPlugin'. It contains a text input field with the placeholder text 'Input a description for the queue (Optional)'. Below the input field are two buttons: 'Aceptar' and 'Cancelar'.

And once accepted or cancel configuration window has to show the added queue.

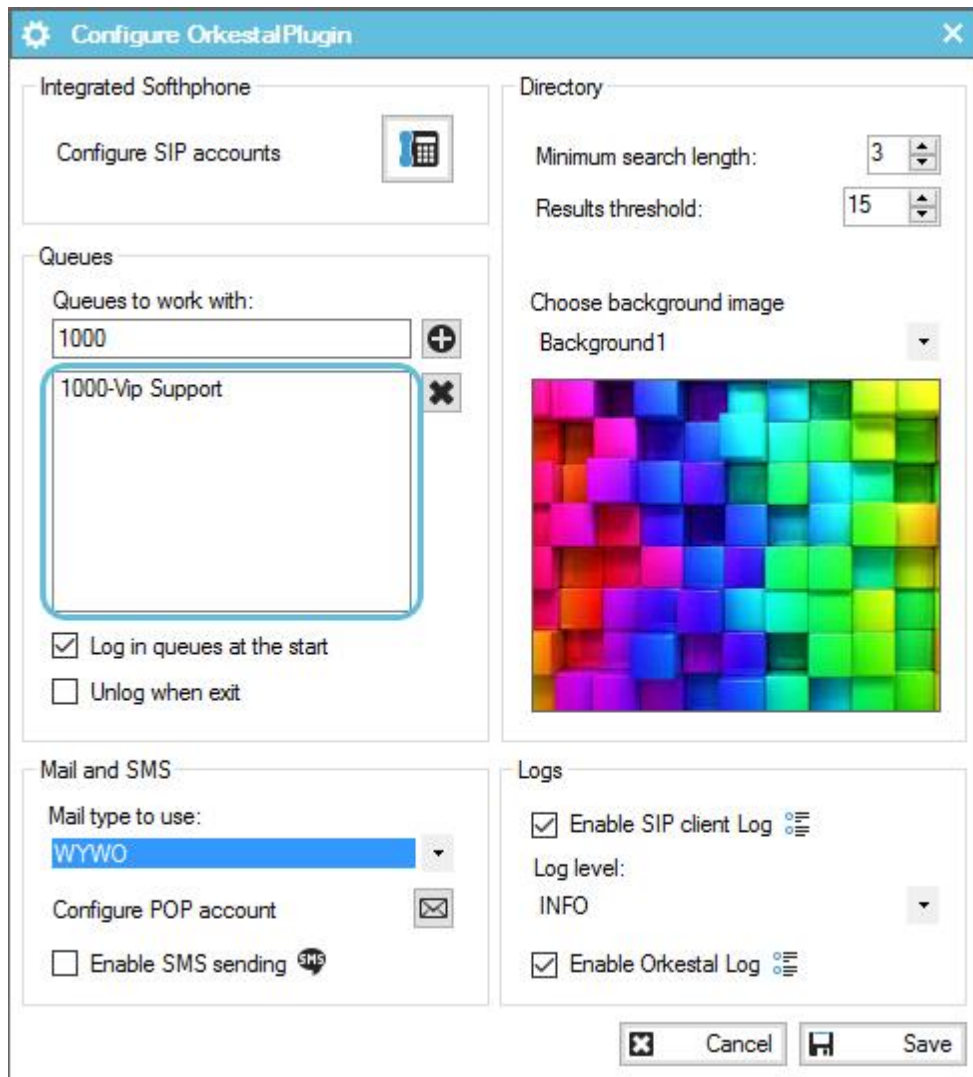

To delete a queue simply select the item in the list and click on the  button. The application will ask to confirm the deletion.